


12-06-99

A

12/03/99



U.S. PTO

Express Mail Label No. EL515088515US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No. NORT-0010-US (10410RRUS01U)
Total Pages in this Submission 09/45/683

U.S. PTO
09/45/683



12/03/99

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

MESSAGING BETWEEN TERMINALS IN DIFFERENT COMMUNITIES

and invented by:

Vivek Kapil, Alwarkurichi Nagaraj and John R. Stevens

If a CONTINUATION APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 23 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
NORT-0010-US (10410RRUS01U)

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 10
- b. ☐ Informal Number of Sheets _____
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL515088515US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
NORT-0010-US (10410RRUS01U)

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☒ Additional Enclosures (please identify below):


Statement of Facts in Support of Filing on Behalf of Nonsigning Inventor;
Petition Under 37 CFR § 1.47(a);
Added Page to Combined Declaration and Power of Attorney for Signature by Joint Inventors.

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	26	- 20 =	6	x \$18.00	\$108.00
Indep. Claims	7	- 3 =	4	x \$78.00	\$312.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$1,180.00

- ☒ A check in the amount of **\$1,180.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **20-1504** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).



Signature

Dan C. Hu, Reg. No. 40,025
Trop, Pruner, Hu & Miles, P.C.
8554 Katy Freeway, Suite 100
Houston, TX 77024
(713) 468-8880 [Ph]
(713) 468-8883 [Fax]

Dated:

Dec. 3, 1999

cc:

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: MESSAGING BETWEEN TERMINALS IN
DIFFERENT COMMUNITIES

APPLICANTS: VIVEK KAPIL, ALWARKURICHI
NAGARAJ, AND JOHN R. STEVENS

Express Mail No.: EL515088515US
Date: December 3, 1999

Prepared by: Trop, Pruner, Hu & Miles, P.C.
8554 Katy Freeway, Ste. 100, Houston, TX 77024
713/468-8880 [Office], 713/468-8883 [Fax]

MESSAGING BETWEEN TERMINALS IN DIFFERENT COMMUNITIESBACKGROUND

The invention relates to messaging between terminals in different communities, such as communities served by different service providers.

5 The increased availability of data networks, such as the Internet or intranets, has increased accessibility among nodes coupled to the data networks. Example communications across such data networks include electronic mail, file transfer, web browsing, and other exchanges of data.

Electronic forms of communications between users over data networks include electronic mail and text chat sessions. However, in using electronic mail, there typically exists some delay in getting a response from a destination user. The delay includes the amount of time for the electronic mail message to get from the originating user to the destination user, the time a user takes to respond to the electronic mail message, and the time to propagate the response message back to the originating user. A destination user may not be sitting at his or her station, or the user may decide not to answer electronic mail until some later time. The originating user does not receive any indication of this, typically having to wait for a response, which may come much later. Further, with some forms of electronic mail messaging, confirmation of receipt of the message is typically not provided.

A more real-time mechanism of communicating between users is provided by chat sessions or instant messaging, available from entities such as Yahoo! Inc. and America Online, Inc. Both instant messaging and chat sessions are communications services that allow two or more individuals to establish real-time communications sessions. Chat sessions may occur in "chat rooms," which are public on-line locations where persons having common interests may chat (using text). Instant messaging provides a private text communications session and includes programs that alert a user if someone on the user's list of individuals is on-line. A chat session can then be initiated with that person. Typically, to establish a chat or instant messaging session, users may have to log on to a third party server, referred to as a chat server in some arrangements. Alternatively, chat or instant messaging sessions are available between users that subscribe to the same service provider, which in effect provides the

common server or servers for the users. Without a centralized server through which users are logged into, chat or instant messaging may not be available.

In addition, if a destination user is not logged on to a predetermined server, then that user is basically unavailable over data networks at that time. The originating user is then left with using other types of communication devices to contact the destination user, such as by using a wireline telephone or a wireless telephone.

A need thus exists for a more robust method and apparatus for communicating over data networks.

SUMMARY

In general, according to one embodiment, a method of establishing a text-based messaging session includes receiving a request from an entity in a first community, the request indicating a desired text-based messaging session with a user in a second community. The user in the second community is notified of a request, and it is determined if the user has accepted the request to establish a text-based messaging session.

In general, according to another embodiment, a method of communicating in a system having a server includes receiving, at the server, a request to access a user. Predetermined information is accessed to determine a plurality of devices that may be employed for communicating with the user. A message is sent to at least a selected one of the plurality of devices.

Some embodiments of the invention may include one or more of the following advantages. Messaging and text-based communications sessions between users in different communities may be performed, in which the different communities may be served by different service providers. In addition, the ability to select one of a plurality of devices through which an individual is to be contacted in response to a contact request provides flexibility in contacting that individual. If the individual is unavailable at a first device, another device may be accessed automatically to try to reach the individual. Also, a user has the option of selecting one or more devices in some preference order through which he or she is to be contacted.

Other features and advantages will become apparent from the following description, from the drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of an embodiment of a communications system in which inter-community text-based communications may occur between terminals coupled to different communities or networks.

5 Fig. 2 is a block diagram of a plurality of communications devices that a service provider associated with a destination user is capable of contacting.

Fig. 3 is a flow diagram of a contact server application in accordance with one embodiment executable by a server operated by a service provider in the communications system of Fig. 1.

10 Fig. 4 illustrates a communications system in which a telephone may be used to message a user located at a terminal.

Fig. 5 is a block diagram of entities involved in establishing and maintaining text chat sessions between a plurality of users according to a distributed architecture.

Fig. 6 illustrates a flow of messages exchanged between entities of Fig. 5.

15 Fig. 7 is a block diagram of entities involved in establishing and maintaining text chat sessions between a plurality of users according to a centralized architecture.

Fig. 8 illustrates a flow of messages exchanged between entities of Fig. 7.

Fig. 9 illustrates a communications system in which a server associated with the originating service provider does not include a chat application.

20 Fig. 10 is a block diagram of components in various entities involved in communications sessions according to various embodiments.

DETAILED DESCRIPTION

25 In the following description, numerous details are set forth to provide an understanding of the present invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these details and that numerous variations or modifications from the described embodiments may be possible.

30 Referring to Fig. 1, a communications system 10 in accordance with one embodiment includes a plurality of communities, with a first community 14 and a second community 16 shown. The communities 14 and 16 are serviced by service providers 20 and 22, respectively, and are coupled by a network 8. A "network" may refer to one or more communications networks, links, channels, or paths.

A "community" refers to a group of terminals or users that are served by a service provider. A service provider controls access to certain networks for terminals and users in the served community. The service provider also may determine the types of services that a user or terminal has subscribed to. A service provider includes
5 one or more server systems that terminals (desktop and mobile units) may be linked to. Such server systems include hardware and software components that perform service provider tasks. A subscriber, through a terminal, may be logged on to a server system to establish a link to the server system. When the subscriber is logged on a server system of the service provider, he or she has an established link with the
10 service provider over which communications between the server system and terminal may occur. When the subscriber is not logged on, the communications link is not active. Logging on to a server refers to providing some type of an identifier, usually in the form of a user name and password, to identify a user or terminal with the server so that a session can be started on the server. Thus, for example, logging on to a
15 server of an Internet service provider allows a subscriber access the Internet.

Various application routines may reside in the terminal 12 to enable access to the network 8. For example, a web browser 24 may be used to browse web pages. An electronic mail application 34 may be used to send and receive electronic mail to users coupled to the Internet or an intranet. A messaging application 38 may be used
20 to establish a chat session or a messaging session with another user on the network 8. In the illustrated embodiment, terminal 12 is associated with user A.

The service provider 22 may also be coupled to terminals, such as terminal 18. The terminal 18 may similarly include a web browser 42, an electronic mail application 36, and a messaging application 40. Other application routines for
25 communicating or obtaining services on the network may also be available. In the illustrated embodiment, user B is associated with the terminal 18.

In accordance with some embodiments, "real-time" inter-community text-based messaging or communications may be performed between terminals in different communities, such as communities 14 and 16 served by service providers 20 and 22,
30 respectively. As used here, "real-time" messaging communications refer to messaging or communications in which some interaction (in the form of exchange of text or other types of viewable messages) is occurring between at least two end users who have acknowledged each other's participation in the session. This is distinguished from traditional electronic mail messaging, in which an interactive

session is not established between users. A "text-based" messaging or communications session is one in which users or terminals exchange text or other forms of visual data to communicate.

As an example, the terminal 12 that is part of the first community 14 may establish a real-time text-based messaging or communications session with the terminal 18 which is part of the second community 16. According to one embodiment, user A on the terminal 12 may access a location of a contact server 30 (e.g., a web page) provided by the service provider 22. In one embodiment, the contact server 30 may include a Common Gateway Interface (CGI) program, as described in the CGI Specification, Version 1.1. In this embodiment, user A on terminal 12 retrieves a web page from the contact server 30, from which the user can indicate that he or she desires to contact user B on the second terminal 18 in the second community 16. The CGI program in the contact server 30 processes the request to determine if user B exists, is a valid subscriber, and logged on to the service provider 22.

Another technique of establishing inter-community messaging is to send requests according to a version of Simple Mail Transfer Protocol (SMTP), as described in Request for Comments (RFC) 821, entitled "Simple Mail Transfer Protocol," dated August 1982. In this arrangement, user A on the terminal 12 may request a messaging or communications session with user B in the second community 16 by initiating a request through user A's service provider 20. In response, the service provider 20 adds the request to its list of contact requests terminating to users outside its domain. The service provider 20 then sends a request to the service provider 22 in the second community 16.

In either arrangement, the contact server 30 may send a message to a contact client 32 in user B's terminal 18 to indicate that user A has made the request. The notification may be in the form of a pop-up screen or other indication (audio and/or video) at user B's terminal 18.

In another embodiment, contact servers and contact clients may be distributed across different service providers and different terminals. For example, in Fig. 1, in this distributed architecture, a contact client may be included in each of the terminals 12 and 18 and contact servers may be included in each of the service providers 20 and 22. In this architecture, to establish a real-time messaging or communications session, user A at the terminal 12 in the first community 14 may start its copy of the

contact client to enter the name of a desired destination user. The contact client in the terminal 12 then establishes communications with a contact server in the service provider 22 of the second community 16. The contact server in the second service provider 22 can then send a rejection indication to the contact client in the terminal 12 if communications is not possible (user B does not exist, is not available, or is not interested), or the contact server may establish communications with the contact client in the terminal 18. A similar procedure is provided by contact clients in the terminals and the contact server in the service provider 20 of the first community 14 if user B wishes to contact user A.

In addition to the ability to establish real-time text-based messaging or communications sessions, some embodiments of the invention may also provide the ability to access one of a plurality of communication devices associated with a destination user through the service provider associated with the destination user. Thus, instead of only the terminal at which the destination user is associated with, the service provider may also access the other devices. Referring to Fig. 2, examples of such communications devices include a pager 102, a wireline telephone 104, an answering device 106, a mobile unit 108, a mobile personal digital assistant (PDA) 110, and other devices. The pager 102 is coupled to a pager service provider 116, which is capable of receiving a call request and transmitting messages to the pager 102 over a wireless link. The telephone 104 and answering device 106 may be coupled to a public switched telephone network (PSTN) 118, which controls communications between telephones wired to it. For mobile devices such as the mobile telephone 108 and the mobile PDA 110, a mobile switching center 120 controls communications between the mobile devices as well as between a mobile device and a wired unit coupled through the PSTN 118.

Communications devices may also be coupled to a packet-based data network, such as an IP (Internet Protocol) network 122. IP is described in RFC 791, entitled "Internet Protocol," dated September 1981. Other versions of IP, such as IPv6, or other packet-based protocols may be utilized in further embodiments. A version of IPv6 is described in RFC 2460, entitled "Internet Protocol, Version 6 (Ipv6) Specification," dated December 1998. A device that may be coupled to the data network 122 is a computer 114. Another device that may be coupled over the data network 122 is an "Internet" telephone 112, which is a telephone that is capable of communicating voice over the packet-based data network 122. The computer 114, if

equipped with speech processing capability, may also be able to communicate voice over the data network 122.

A system 129 that is part of a service provider (e.g., 22) may be capable of communicating with the multiple communication devices. The system 129 may include a network interface 130 for communicating with the data network 122, and a voice network gateway 132 for communicating with the PSTN 118 over a line 123 (e.g., a T1 line). Text messages from the contact server 30 may be converted into voice by a data-to-voice converter 134, such as a text-to-speech (TTS) device. The voice data may be sent as packets over the data network 122 by the network interface 130, or as voice signals over the line 123 to the PSTN 118. The voice data is sent to a voice communications device, which may be one of the telephone 104, answering device 106 or mobile telephone 108. Text messages may be sent without conversion through either the voice network gateway 132 or the network interface 130 to non-voice communications devices such as the pager 102, mobile PDA 110, or computer 114.

In accordance with some embodiments, the contact server 30 may be configured to select one of the multiple communications devices based on some predetermined criteria, such as user preferences. The contact server 30 forwards the message (in text form or voice form, depending on the selected device) to the communications device. Referring to Fig. 3, the process performed by the contact server 30 (or by other contact servers in other service providers) in establishing a real-time text-based messaging or communications session is illustrated. In response to receiving (at 202) a request to contact a user, such as user B in community 16, the contact server 30 determines (at 204) if the user exists and is a subscriber of the service provider 22. If not, an error is returned (at 206). If the destination user is a subscriber, then the contact server 30 may determine (at 208) if the user is logged on. The contact server 30 may determine this by checking its internal registry to see if a subscriber is logged on. If so, the contact server 30 may inform (at 210) the user through the second terminal 18. This may be in the form of a pop-up graphical user interface (GUI) or some audible tone presented at the terminal 18. The pop-up message may also include options selectable by the destination user to determine whether to accept the message at the terminal 18 or to accept the message through one or more other communications devices, such as a pager, a telephone, an answering

device, a mobile telephone, a PDA, a voice over IP telephone, electronic mail, or some other communications device.

The contact server 30 next accesses (at 212) a "locate me list" (LML), such as the one in Table 1 below, to determine the types of communications devices that a destination user prefers to be contacted by. Also, by this time, the user at terminal 18 may have responded to the notification sent at 210. The user may have specified a destination device that is different from a destination device set in the LML.

The contact server 30 then determines (at 214) if the terminal (e.g., a computer) is specified. If so, the contact server 30 may establish (at 216) a text chat session if the destination user so accepts. If the communications device specified is not the terminal, then the contact server 30 determines (at 218) if the user-selected communications device is a voice device. If not, the contact server 30 sends (at 220) a text message to the target communications device. However, if the destination communications device is a voice device, then the contact server 30 uses (at 222) a data-to-voice converter to convert the text message into a voice message. The voice message is then delivered (at 224) to the target communications device, through either the voice network gateway 132 or the network interface 130 (Fig. 2).

TABLE 1

LML (User B)	
1 st Choice	Chat
2 nd Choice	Telephone
3 rd Choice	Pager
4 th Choice	Voice Over IP Unit
5 th Choice	E-Mail
.	.
.	.
.	.

As shown in Table 1, a user, such as user B, may specify in the LML a list of communications devices according to some predetermined order. For example, user B may specify a chat session as the most preferred type of communications when contacted by another user. The LML may also specify other communications devices

in descending preference order, such as a telephone, a pager, a voice over IP unit, electronic mail, and so forth. In another embodiment, a plurality of the communications devices specified in the LML may be contacted at the same time instead of sequentially. When an attempt to establish communications with the most preferred communications device fails, the contact server 30 may go down the list to other communications devices. For example, if after some period of time, user B does not respond to an invitation to establish a chat session, the contact server 30 may go to the second entry, which is a telephone (wired or wireless). The contact server 30 then makes a call to the telephone number set in the LML through the PSTN 118. Some limit may be set on how many times the telephone may be allowed to ring. The telephone may be either picked up by user B or answered by an answering device (e.g., an answering machine or an answering service). When the contact server 30 detects that the remote telephone has been picked up, the text message that has been converted to speech is transmitted to the telephone or answering machine or service.

If, however, the preset number of rings of the telephone has been exceeded, then a failure is indicated and the contact server 30 may go to the next preferred communications device, in this example a pager. The contact server dials the telephone number of the pager. When prompted for a message by the pager service provider 116, the contact server 30 sends its numeric or text message to the pager service provider, which transmits the message to the pager. The numeric message may include the telephone number of the origination user, in this case user A. Alternatively, a text message may also be sent along with the numeric telephone number.

If an attempt to reach the pager fails, the contact server 30 goes to the next entry of the LML, which may be a voice over IP unit. The voice over IP unit may be a telephone adapted with a network card that is capable of connecting to the data network 122, or it may be a personal computer that has been set up with speech processing capabilities. The contact server 30 calls the telephone number associated with the voice over IP unit. The call may be placed to the voice over IP unit using ringing with an H.323 compliant application (e.g., Microsoft NetMeeting) voice client. The H.323 Recommendation sets multimedia standards for the communications of audio, video, and data communications over packet-based networks, such as IP networks. H.323 is a recommendation from the International Telecommunications Union (ITU).

If the voice over IP unit answers in less than a predetermined number of rings, a text message is converted to speech and communicated over the IP network 122 to the voice over IP unit. If the call is not answered within a predetermined number of rings, then the contact server 30 moves to the next entry in the LML, in this case
 5 electronic mail. The contact server 30 then sends the text message in an electronic mail to the e-mail address of user B. The electronic mail message may be received by an e-mail receiver, which may be any terminal that the user can use to gain access to his e-mail server. Additional choices may be available in the LML.

The foregoing describes a scenario where user B (the destination user) is
 10 logged onto the service provider of his or her community. If user B is not logged on (as determined at 208), then the contact server 30 accesses (at 230) the LML to determine the desired order of communications devices. Another option is that plural communications devices may be contacted at the same time. Using Table 1 as an example, the first choice is a chat session. Because the user is not logged on, a chat
 15 session cannot currently be established. However, the LML may also specify if a reverse log-on procedure may be performed onto user B's computer. User B may specify who may initiate a reverse log-on to his or her personal computer. Such preferences may be stored as part of the LML or in a separate database that is accessible by the service provider 22. The reverse log-on to user B's personal
 20 computer may be performed by the service provider dialing back into user B's computer, setting up a PPP (point-to-point) connection, assigning an IP address, and presenting user A's contact request to user B. PPP is described in RFC 1661, entitled "The Point-to-Point Protocol (PPP)," dated June 1994.

If reverse log-on is enabled, the chat server 30 determines (at 232) if user B's
 25 terminal is specified as the most preferred choice in user B's LML. If so, the chat server 30 performs a reverse log-on (at 234) to user B's terminal. User B is then notified (at 242) of the call request at his or her terminal. If the user accepts, a chat session is established (244) between user A and user B.

If reverse log-on is not enabled or if user B's terminal is not specified as the
 30 most preferred choice in the LML (as determined at 232), then the contact server 30 determines (at 236) if the communications device is a voice device. If not, the contact server 30 sends (at 246) a text message to the communications device. If the communications device is a voice device, then the contact server 30 uses (at 238) a

data-to-voice converter to convert the text message into voice data. The voice data is then delivered (at 240) to the selected communications device.

Referring to Fig. 4, an originating user such as user A can use a telephone 300 to contact user B at his or her terminal 18. User A can dial a predetermined telephone number, which is routed by the PSTN 118 to the system 129 associated with the service provider 22 of user B. Once a connection is established through the PSTN 118, user B may speak into the telephone 300, with the voice data passed through the PSTN 118 to the voice network gateway 132. The voice network gateway 132 communicates the voice data to the data-to-voice converter 134, which converts the voice data into one or more data messages (e.g., text messages). The text messages are passed to the contact server 30, which in turn communicates the text messages to the contact client 32 located in the terminal 18 of user B. Thus, as the user speaks into the telephone 300, a text message may appear on user B's terminal. User B may then respond by typing in a text message, which is sent in the reverse path back through the system 129 and PSTN 118 as voice back to the telephone 300. A real-time text-based communications session can thus be established between a user at a telephone on one end and a user at a text-based terminal on the other end. In this example, the text-based communications session is part of an overall communications session that also includes voice at one end.

In the Fig. 4 example, the contact server 30 may also be capable of routing the call from user A to another communications device as specified by the LML of user B. Thus, for example, the contact server 30 may direct user A's call to an answering device, a pager, or even an electronic mail, as discussed above.

Embodiments of messaging methods and systems have been described that allow a user located in a first community to call or contact a user located in a second community to establish a real-time text-based messaging or communications session. Further, some embodiments allow a service provider to route a contact request to communications devices other than a terminal that the destination user is sitting at. Such routing to an alternative device may be according to destination user preferences. For example, the user may specify a list of communications devices in some preference order. As a result, when a user is contacted, a service provider may attempt to contact the destination user according to the list of preferences. This allows a user to be contacted even if the user is not sitting at his or her computer.

Another aspect of some embodiments of the invention is the ability to establish text-based chat or messaging sessions across different communities. To establish a chat or messaging session, several architectural solutions may be available. For example, in a first architecture (a distributed architecture), chat applications may
5 be available on servers of all service providers. A chat application refers to a set of software and hardware components that enable a user to participate in a text-based chat or messaging session.

A second, alternative architecture includes chat applications residing on computers or other terminals of all users involved in the chat or messaging session.

10 Another architecture includes chat applications residing on servers of all involved service providers combined with a third party server that mixes the inter-service provider chat or messaging sessions. Another architecture includes chat applications residing on the servers of either the origination or termination service provider (but not both). The servers referred to may be part of the contact servers described in
15 connection with Fig. 1.

Referring to Fig. 5, a distributed architecture for establishing chat sessions between multiple users (users A, B, and C illustrated) include chat applications provided in each of servers 400, 402, and 404, respectively, of service providers associated with users A, B, and C, respectively. Reference to chat sessions is meant
20 to include any type of communications sessions in which some form of text or other visual data (including images) are exchanged between terminals. The service providers associated with users A, B, and C are referred to here as service providers A, B, and C, respectively. The servers 400, 402, and 404 are coupled through a network 412, which may include the Internet and/or intranets. For each initiated text
25 chat session, a chat session object is created containing the details (e.g., service provider domain, chat identifiers, preferences) of the participating members. In one embodiment, there is one chat session object per server. The chat session objects are indicated as 406, 408, and 410 on servers 400, 402, and 404, respectively. Each chat session object is assigned a unique object ID.

30 A chat session object sends the text message of one or more participating members to a designated port at each of the other service provider domains involved with the chat session. The chat session object includes the identifiers (IDs) of the users involved in the chat session in a given community (also referred to as the domain of the service provider). The combination of a user ID and a domain ID (e.g.,

A@A-ISP.COM, B@B-ISP.COM) uniquely identifies a user. Thus, for example, the chat session object 406 maintains a list of users, which may include A@A-ISP.COM plus any other user located in the community provided by service provider A (having a domain ID A-ISP.COM). The other chat session objects 408 and 410 maintain similar lists for communities that those servers are associated with. Each chat session object handles incoming chat messages and sends outgoing chat messages.

The chat session object presents the incoming chat message as coherent dialog to a client chat user interface on the terminal of each participating user. In the illustrated embodiment of Fig. 5, client chat user interfaces 420, 422, and 424 are provided on terminals 414, 416, and 418, respectively, of users A, B, and C.

The chat session objects 406, 408, and 410 in the illustrated embodiment are configured as one of two objects: a controller chat session object or a participating chat session object. The chat session object that initiated the chat session may be designated as the controller object while the other chat session objects are designated as participating objects. In the illustrated embodiment of Fig. 5, user A is the origination user. Thus, the chat session object 406 is designated as the controller object, while the chat session objects 408 and 410 in servers 402 and 404 are designated as participating objects.

The controller object 406 is responsible for aggregating incoming text messages from all of the participating objects and broadcasting the resulting message stream to the participating objects. The controller object 406 keeps a list of all participating objects that are involved in the chat session. A participating object sends chat messages to, and receives chat messages from, the controller object. Participating objects are unable to send chat messages directly to each other. When a participating chat session object does not have any user in its user list, that session object sends a message to the controller object to remove it from the controller object's participating object list and destroys itself. Alternatively, the participating chat session object may be removed by the controller object, or the participating object may be left dormant without being destroyed.

In further embodiments, the segregation of tasks between controller and participating objects may be eliminated. Thus, each chat session object may perform the same tasks as all other objects to achieve an even more distributed architecture in which any two chat session objects may communicate directly with each other (instead of through a controller object) through the network 412.

The chat session objects exchange chat application messages to carry the text messages between users. A chat application message has an address part and a data part. The address part has the unique object ID of the destination chat session object and the data part has the actual text message that the chat members send to each other.

- 5 When a chat session object receives an incoming message, it extracts the text portion (the data part) from the incoming message and transmits it to all of the users currently in that session within its domain or community.

- Referring to Fig. 6, a flow sequence for establishing a chat session is illustrated. An originating server listens at a predetermined port for chat requests from an originating terminal. If a chat request is received at the originating server, a controller chat session object is created (at 502) on the originating server with a unique object ID and domain ID. The chat request along with associated information is then passed to a destination server or servers identified in the request. The associated information includes the destination user names, the object ID and domain ID of the originating server, and domain ID of each destination chat session object.
- 10 15 Each destination server then determines (at 504) if the identified users exist, are available (logged on), and interested in the requested chat session. The destination server may send a notification of the chat request to the destination terminal (if the user is on-line), which may respond with a message indicating acceptance or rejection of the request. If the destination user does not exist, is unavailable, or has rejected the chat request, the destination server sends some form of a rejection message back to the originating server.
- 20

- However, if the request is accepted by the destination server, then the destination server creates (at 506) a participating chat session object. The unique object ID and domain ID of the participating chat session object is sent back to the controller chat session object. After messages are exchanged between the servers and each of their corresponding terminals, a chat session has been successfully created. In the established chat session, chat messages are communicated among the terminals through the chat session objects.
- 25

- 30 In an alternative arrangement, a participating chat session object may be created upon receipt of the request. The participating object then determines if users are available or not.

A second type of architecture includes chat client applications residing on the terminals of involved users instead of on the service provider servers 400, 402, and

404. Each chat client creates an object associated with an initiated chat session, similar to chat objects created by the servers in the embodiment of Fig. 5. Each client chat object checks the incoming chat data to see whether it is addressed to it and decodes the message and presents it to the chat client user interface. As with the server chat objects in the Fig. 5 embodiment, the client chat objects may be designated as a controller object and one or more participating objects. Alternatively, the “controller” and “participating” designation of the client chat objects may be eliminated to allow client chat objects to communicate directly with each other instead of through a controller object.

Referring to Fig. 7, a centralized architecture is provided in which a third party or central server 602 cooperates with servers associated with the several service providers A, B, and C to establish a chat session between inter-community terminals. An advantage of using the centralized architecture is that complexity of inter-domain chat systems is reduced, as compared to the Fig. 5 architecture. For each text chat session, a controller chat session object 610 is created in the central server 602 that has the details of all participating members in the chat session. The controller chat session object in the central server 602 functions as a chat exchange controller. Chat session objects (participating objects) are also created in each server involved in the chat session. The chat exchange controller processes incoming chat messages from a participating chat object and routes them to the other participating chat objects.

Service providers connect to the domain provided by the central server 602 to retrieve chat messages on a per-chat session basis and each presents chat messages to end users in their respective domains. The chat session objects created in each of the servers 400, 402, and 404 are participating objects, regardless of which user initiated the chat session.

Referring to Fig. 8, the flow sequence for establishing a chat session between an originating server and one or more destination servers is illustrated. An originating server listens at a predetermined port for a request for a chat session from an originating terminal. When a chat session request is received, the originating server creates (at 702) a participating chat session object that has a unique object ID. The originating server then passes the chat request and associated information to the central server. The associated information includes the object ID, the domain ID, the destination domain names, and a list of destination users. On receipt of the request, the central server 602 creates a controller chat session object (at 704). The central

server 602 then passes the chat request along with associated information to each destination domain named in the incoming request from the originating server. The associated information includes the user names in the destination servers along with the object ID of the controller chat session object.

5 Upon receiving the request from the controller object in the central server 602, each of the one or more destination servers determines (at 706) whether at least one user in the request exists, is available, and is interested in a chat connection. If the user does not exist, is unavailable, or is not interested, then the destination server may respond with a rejection message. Messages may be exchanged with the destination
10 terminal to determine user interest. If at least one user is available and interested, then the request is considered successful. The destination server then creates (at 708) a participating chat session object. The chat object of each destination server then sends its object ID and associated information back to the central server 602, addressed to the controller object.

15 After messages between servers and corresponding terminals have been exchanged to establish the chat session, a chat session is created in which the controller object in the server 602 providing a common interface through which the participating chat objects pass chat messages. A distinction of the central server 602 in accordance with some embodiments and a chat server of conventional systems is
20 that users do not have to log-on or otherwise create an explicit link with the central server 602 to establish a chat session. The controller object in the server 602 is transparent to users at the terminals. Instead, it is the cooperation of chat session objects in the central server 602 and the other servers which provides the chat link.

25 The foregoing architectures assume that all service providers have application servers capable of establishing chat sessions. However, in some arrangements, this may not be true. An alternative architecture is defined to provide chat conferencing facilities for users associated with service providers that do not have chat applications. In this alternative arrangement, such users may establish a chat connection by using a web browser.

30 Referring to Fig. 9, an example arrangement of this alternative is illustrated in which the service provider 802 associated with user A does not have a chat application while the service provider 804 associated with user B does have a chat application. User A may request contact with user B, as described above in connection with Figs. 1-4. A pop-up screen 806 may be displayed in a terminal 808 at

which user B is sitting. If user B presses a button on the pop-up screen 806 to accept a text-based chat session, then the following tasks may occur to enable a chat session between users A and B even though user A does not have access to a chat facility.

The chat application 808 of the service provider 804 triggers a response to user A's contact request that opens a new web browser window 810 in the terminal 812 that user A is using. In an alternative embodiment, instead of a new web browser window, an existing web browser window may be updated with a web page to allow the user access to the chat session. The web browser 810 invites user A to participate in a chat session with user B. In this arrangement, the service provider 802 that user A is associated with does not need a chat application since the chat session is being provided by the chat application 808 of user B's service provider 804.

The example given above illustrates a point-to-point chat session. In another example arrangement, a multi-point chat session may be established. Thus, in one example, user A may desire to establish a multi-point chat session with users B, C, and D. User A, as discussed above, is logged onto a service provider 802 that does not provide a chat facility. User A (A@A-ISP.COM) may request contact with the following users: B@B-ISP.COM, C@C-ISP.COM, and D@D-ISP.COM. A pop-up screen 806, 826, or 828 on terminal 808, 818, or 820 announces that user A would like to contact user B, C, or D, respectively. If each of users B, C, and D presses a button on the pop-up screens 806, 826, and 828 to accept the chat session, the chat servers at service providers 804, 814, 816 may trigger responses that open respective web browsers 810, 830, and 832 to invite user A to participate in chat sessions with users B, C, and D. Alternatively, instead of multiple web browsers, a web browser window may be configured into multiple sections, one for each destination user.

Referring to Fig. 10, example components of servers or terminals in the communications systems described above are illustrated. Each server or terminal (referred to generically as a system) includes software application routines or modules 908 and 914, respectively. The application routines or modules include the various messaging and chat routines or modules described above. The application routines or modules 908 or 914 may communicate over a network through network stack and driver layers (910 and 916) and network interfaces (912 and 918). The network stack may include a TCP/IP (Transmission Control Protocol/Internet Protocol stack). A network interface may include a network controller or network controller card. The software routines and modules in each system 900 or 902, including applications 908

or 914, may be executable on a control unit 904 or 920. A storage unit 906 or 922 is also included in each system to store data and instructions (e.g., instructions of the routines and modules for performing tasks associated with chat sessions).

Each control unit 904 or 920 may include one of the following components:

5 microprocessors, microcontrollers, processor cards (including one or more microprocessors or microcontrollers), and other control or computing devices. Each storage unit 906 or 922 may include machine-readable storage media for storing data and instructions. The storage media may include different forms of memory including semiconductor memory devices such as dynamic or static random access
10 memories (DRAMs or SRAMs), erasable and programmable read-only memories (EPROMs), electrically erasable and programmable read-only memories (EEPROMs), and flash memories; magnetic disks such as fixed, floppy and removable disks; other magnetic media including tape; and optical media such as compact discs (CDs) or digital video discs (DVDs). Instructions that make up the various software routines or modules in each system may be stored in each respective
15 storage unit. The instructions when executed by a respective control unit cause the respective system to perform programmed acts.

The instructions of the software routines or modules may be loaded or transported into a system in one of many different ways. For example, code segments
20 including instructions stored on floppy disks, CD or DVD media, a hard disk, or transported through a network interface card, modem, or other interface device may be loaded into the system and executed as corresponding software routines or modules. In the loading or transport process, data signals that are embodied as carrier waves (transmitted over telephone lines, network lines, wireless links, cables, and the
25 like) may communicate the code segments including instructions to the system. Such carrier waves may be in the form of electrical, optical, acoustical, electromagnetic, or other types of signals.

While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and
30 variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall within the true spirit and scope of the invention.

What is claimed is:

- 1 1. A method of communicating in a network having a plurality of
2 communities each including a server, the method comprising:
3 receiving, from the server in a first community, a request indicating
4 desired real-time, text-based messaging from a first terminal coupled to the first
5 community server to a second terminal coupled to the server in a second community;
6 and
7 processing the request, by the server in the second community, to
8 establish the real-time, text-based messaging session between the first and second
9 terminals through the first and second community servers.
- 1 2. The method of claim 1, further comprising determining if the second
2 terminal has an established link with the second community server.
- 1 3. The method of claim 2, further comprising sending a notification to the
2 second terminal of the desired messaging session if the second terminal has an
3 established link with the second community server.
- 1 4. The method of claim 3, receiving an indication from the second
2 terminal of whether the desired messaging session has been accepted.
- 1 5. The method of claim 2, further comprising sending a message to a
2 predetermined communications device other than the second terminal if the second
3 terminal does not have an established connection with the second community server.
- 1 6. The method of claim 5, wherein sending the messages includes
2 sending to a communications device including at least one of a telephone, a pager, and
3 an electronic mail receiver.
- 1 7. The method of claim 2, further comprising performing a reverse log on
2 to the second terminal if the second terminal does not have an established link with
3 the second community server.

1 8. The method of claim 1, further comprising establishing a chat session
2 between the first and second terminals.

1 9. A method of communicating in a system having a server, comprising:
2 receiving, at the server, a request to contact a user;
3 accessing predetermined information to determine a plurality of
4 devices that may be employed for communicating with the user; and
5 sending a message to at least one of the plurality of devices.

1 10. The method of claim 9, further comprising storing the predetermined
2 information listing a plurality of devices including a telephone and at least one other
3 device.

1 11. The method of claim 10, wherein sending a message to the telephone
2 includes sending it to a public switched telephone network.

1 12. The method of claim 10, further comprising converting a message into
2 voice data to send to the telephone.

1 13. The method of claim 10, wherein the at least one other device is a non-
2 voice device.

1 14. A system comprising:
2 a controller adapted to receive a request for establishing a messaging
3 session with a user;
4 a storage unit containing information identifying a plurality of devices
5 that may be used to contact the user; and
6 an interface unit adapted to send a message to at least one of the
7 devices.

1 15. The system of claim 14, wherein the information identifies a voice
2 device and at least another device.

1 16. The system of claim 15, wherein the voice device includes a telephone.

1 17. The system of claim 15, wherein the at least one other device includes
2 a non-voice device.

1 18. The system of claim 15, further comprising a data-to-voice converter
2 to convert data into voice.

1 19. A server for use in a communications system having a plurality of
2 communities coupled by a network, each community associated with a different
3 service provider, the server being associated with a first one of the communities and
4 comprising:

5 an interface unit adapted to receive a contact request over the network
6 from an entity associated with another community, the entity not logged on to the
7 server, the contact request indicating a request to establish a text-based messaging
8 session with a destination terminal linked to the server; and

9 a controller adapted to send a notification to the destination terminal of
10 the contact request and to receive an indication from the destination terminal of
11 acceptance of the contact request.

1 20. An article including one or more machine-readable storage media
2 containing instructions for establishing a text-based messaging session between
3 subscribers in a plurality of communities, each community associated with a different
4 service provider, the instructions when executed causing a system in a first
5 community associated with a first service provider to:

6 receive a request from a subscriber in a second community associated
7 with a second service provider, the request indicating a desired text-based messaging
8 session with a subscriber in the first community;

9 notify the subscriber in the first community of the request;
10 determine if the subscriber in the first community has accepted the
11 request; and

12 establish the text-based messaging session between the subscribers if
13 the subscriber in the first community accepted.

1 21. The article of claim 20, wherein the one or more storage media contain
2 instructions that when executed cause the system to further send signaling to establish
3 the text-based messaging session.

1 22. The article of claim 20, wherein the text-based messaging session
2 includes a chat session.

1 23. The article of claim 20, wherein the one or more storage media contain
2 instructions that when executed cause the system to create a controller object adapted
3 to control the text-based messaging session.

1 24. The article of claim 20, wherein the one or more storage media contain
2 instructions that when executed cause the system to:
3 receive a request from a subscriber in a third community associated
4 with a third service provider for a text-based messaging session; and
5 establish the text-based messaging session among the subscribers in
6 the first, second, and third communities.

1 25. A data signal embodied in a carrier wave comprising one or more code
2 segments containing instructions for communicating in a network having a server, the
3 instructions when executed causing the server to:
4 receive a request to contact a user;
5 access predetermined information to determine a plurality of devices
6 that may be employed for communicating with the user; and
7 send a message to at least one of the plurality of devices.

1 26. A communications system, comprising:
2 a plurality of service providers each providing a communications
3 network;
4 a plurality of terminals coupled to respective communications
5 networks provided by service providers; and
6 a control unit adapted to receive a messaging request from a terminal
7 coupled to a first communications network and to establish a real-time messaging
8 session with a second terminal coupled to a second communications network.

ABSTRACT OF THE DISCLOSURE

A communications system includes a plurality of communities each associated with a service provider. Text-based messaging sessions, such as chat sessions, may be established between users in the communities. A request is received from a user in a first community, the request indicating a desired text-based messaging session with
5 a user in a second community. The user in the second community is notified of a request, and it is determined if the user has accepted the request to establish a text-based messaging session. If so, the text-based messaging session is established between users in the first and second communities. If the user is not available, predetermined information stored in a server may be accessed to determine a plurality
10 of devices that may be employed for communicating with the user. A message is sent to at least a selected one of the plurality of devices.

004469 08345400

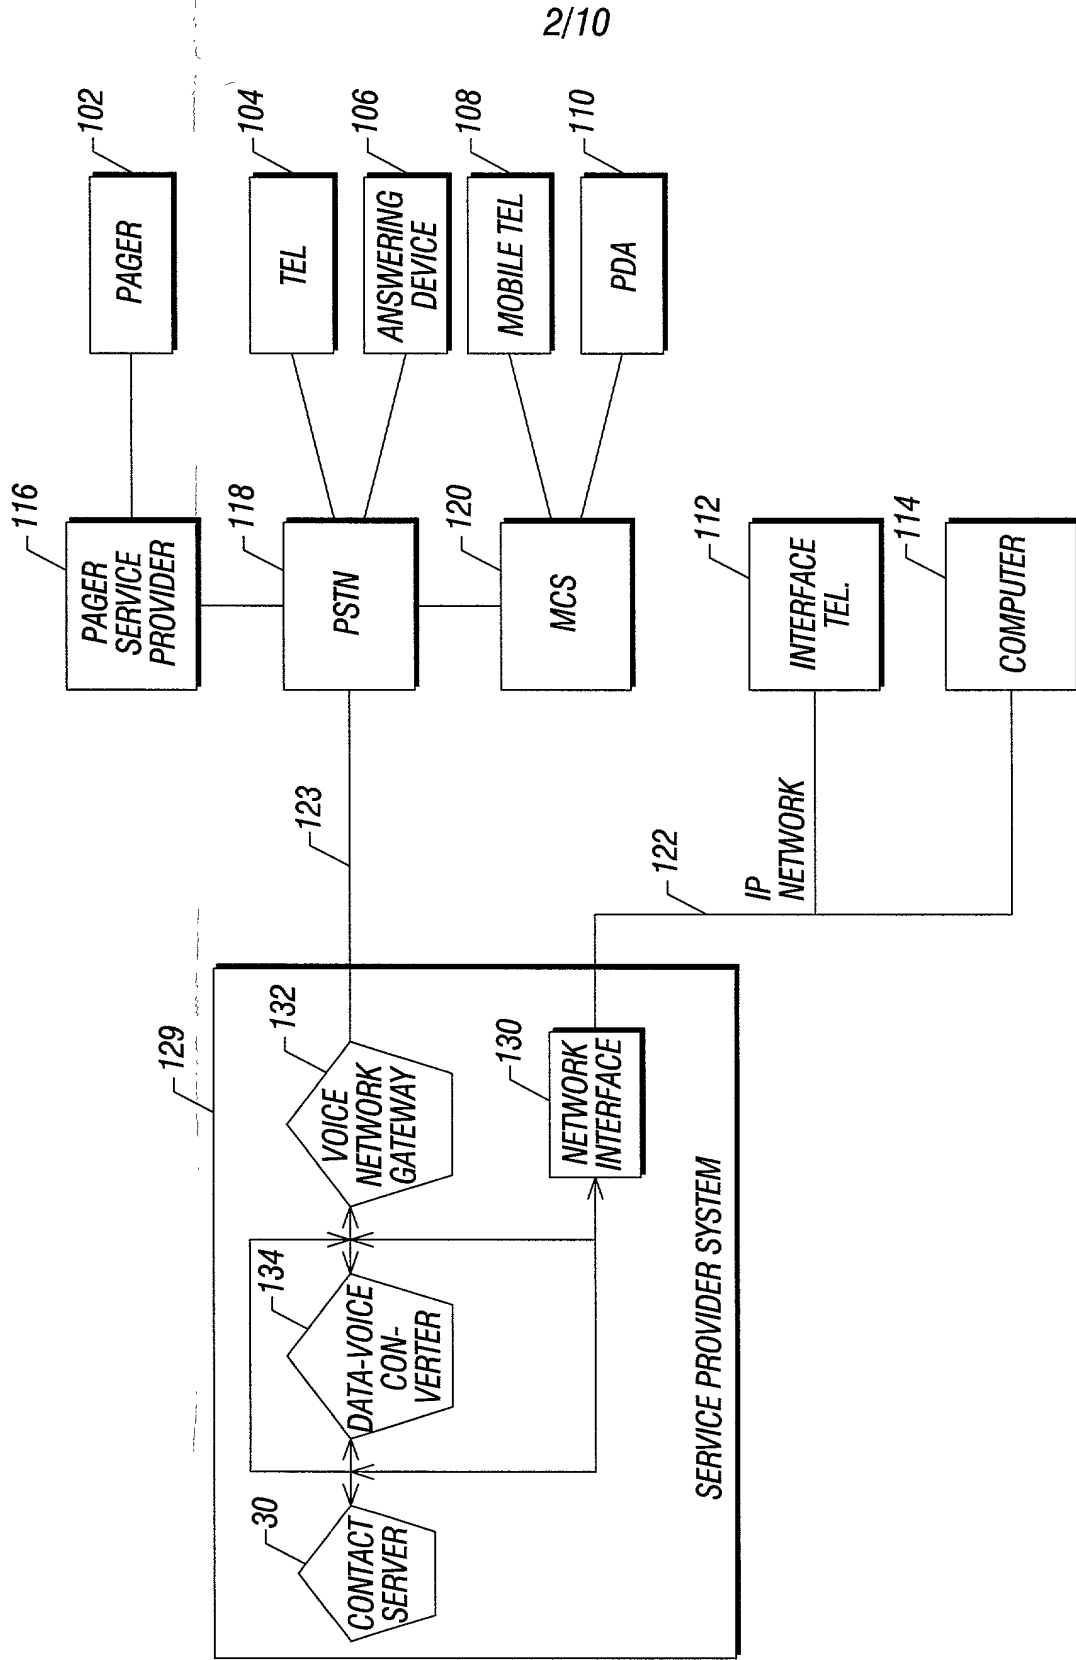


FIG. 2

3/10

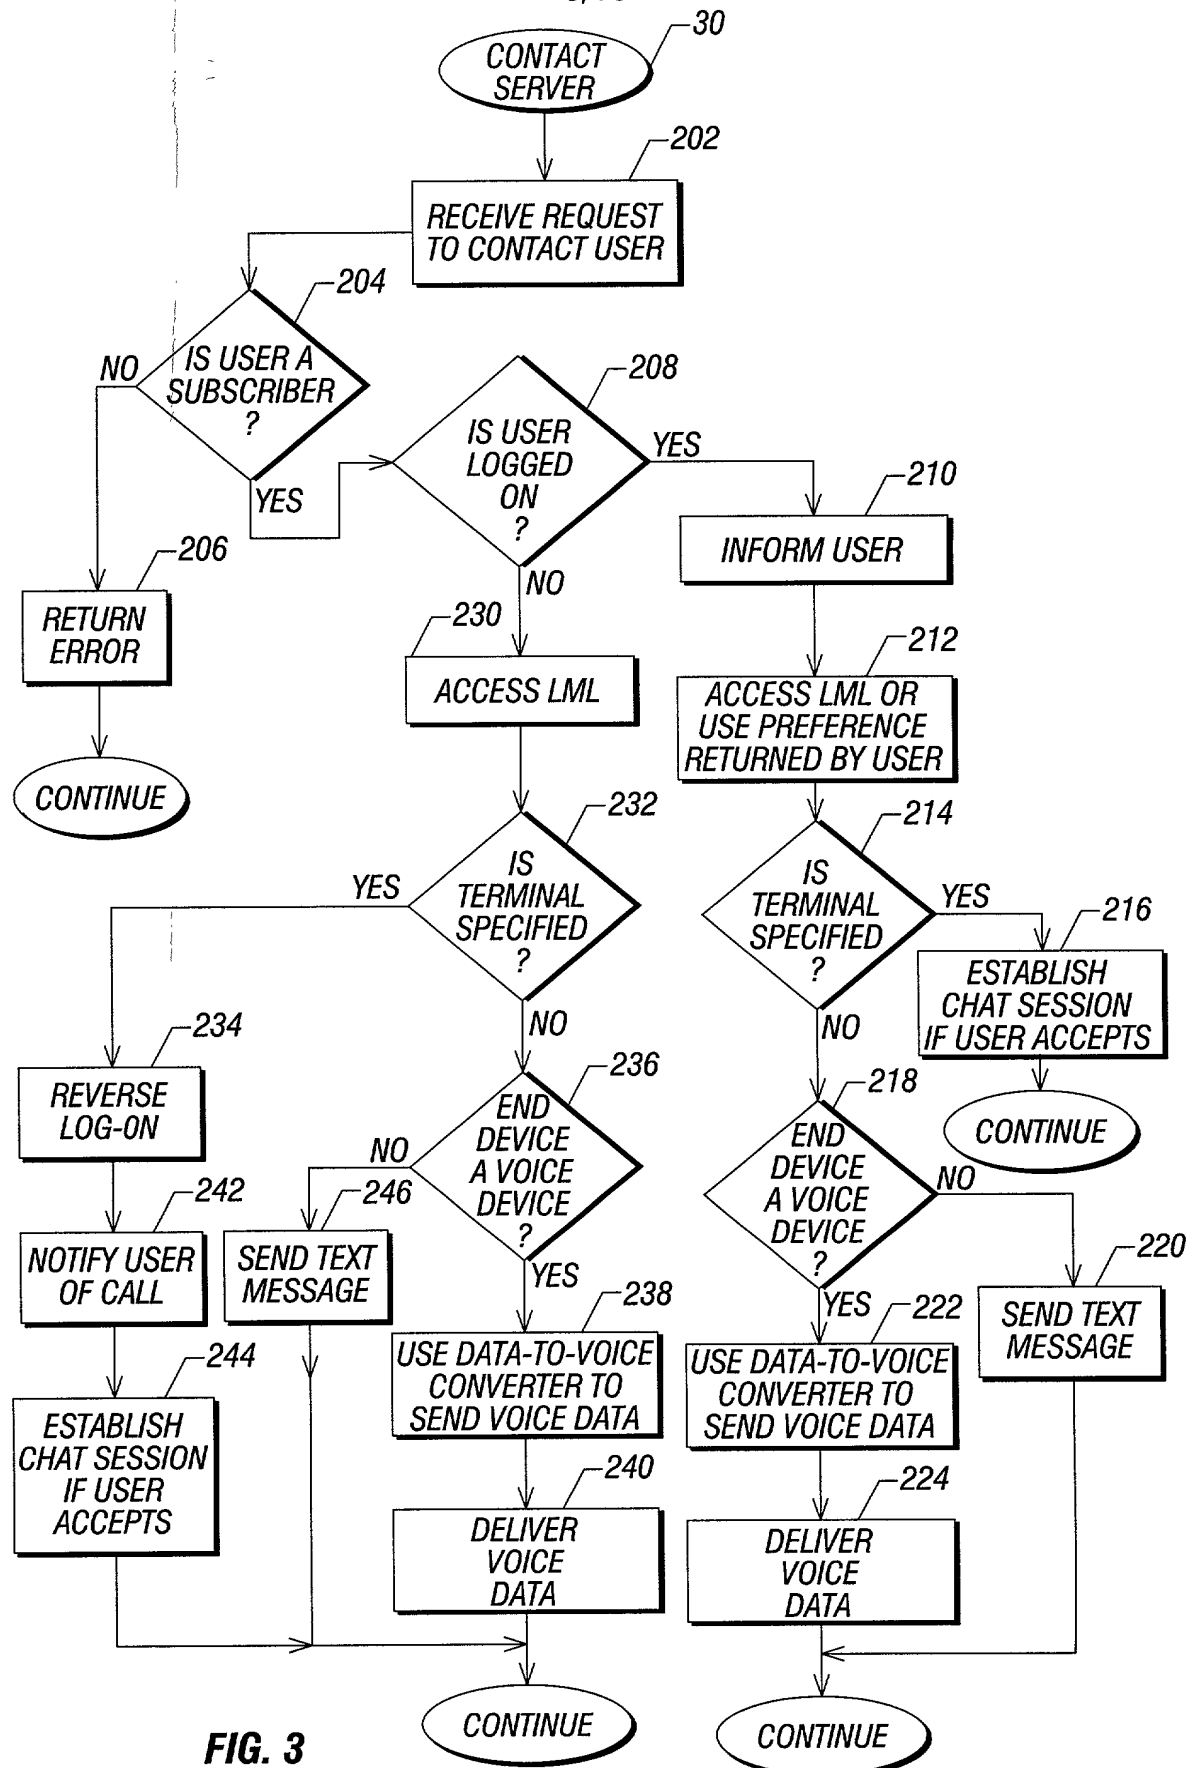


FIG. 3

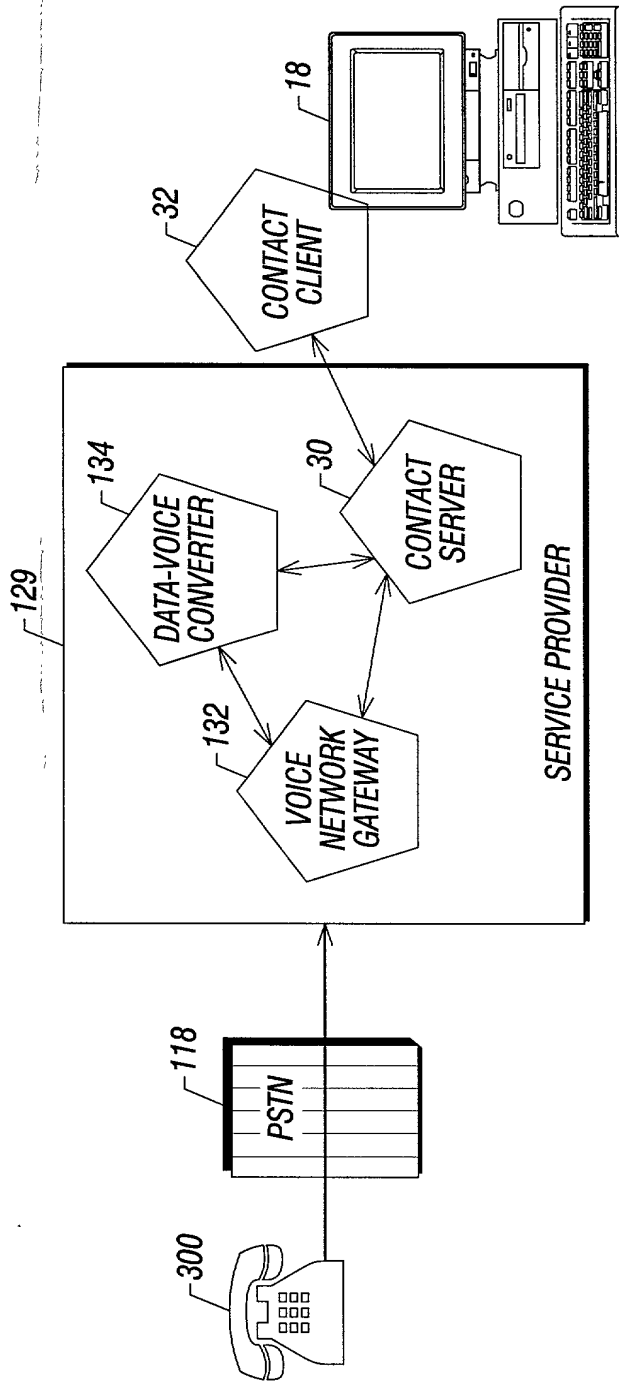


FIG. 4

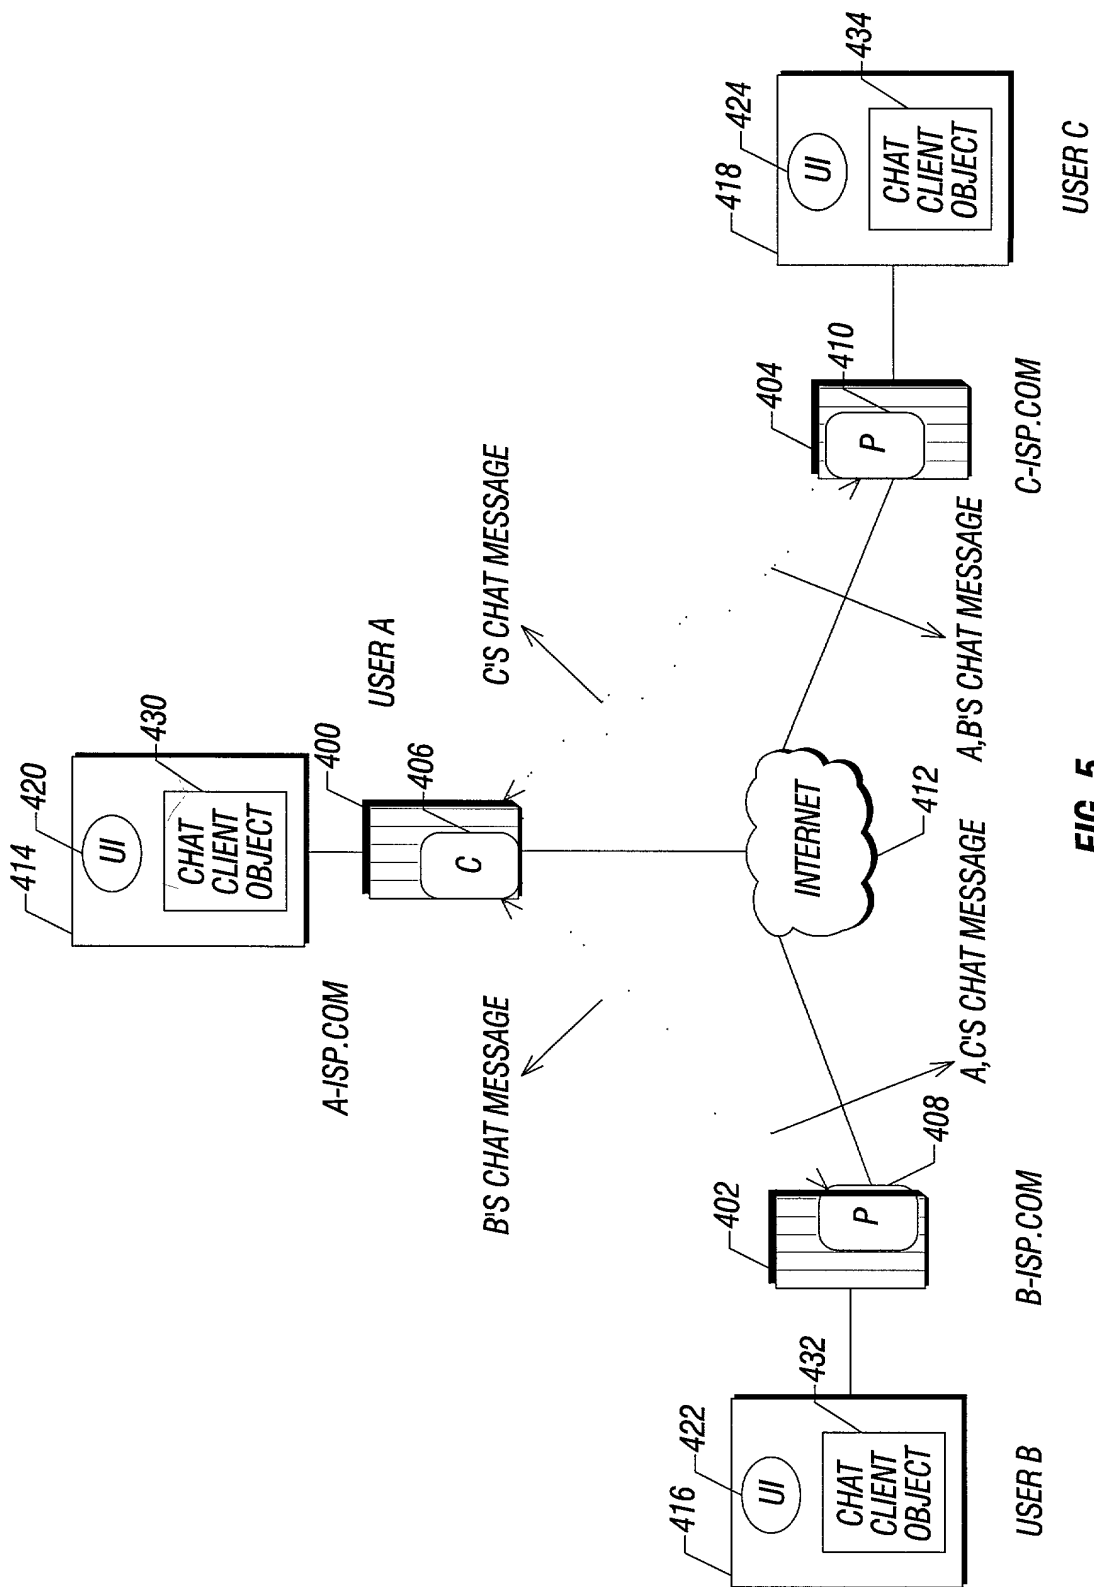


FIG. 5

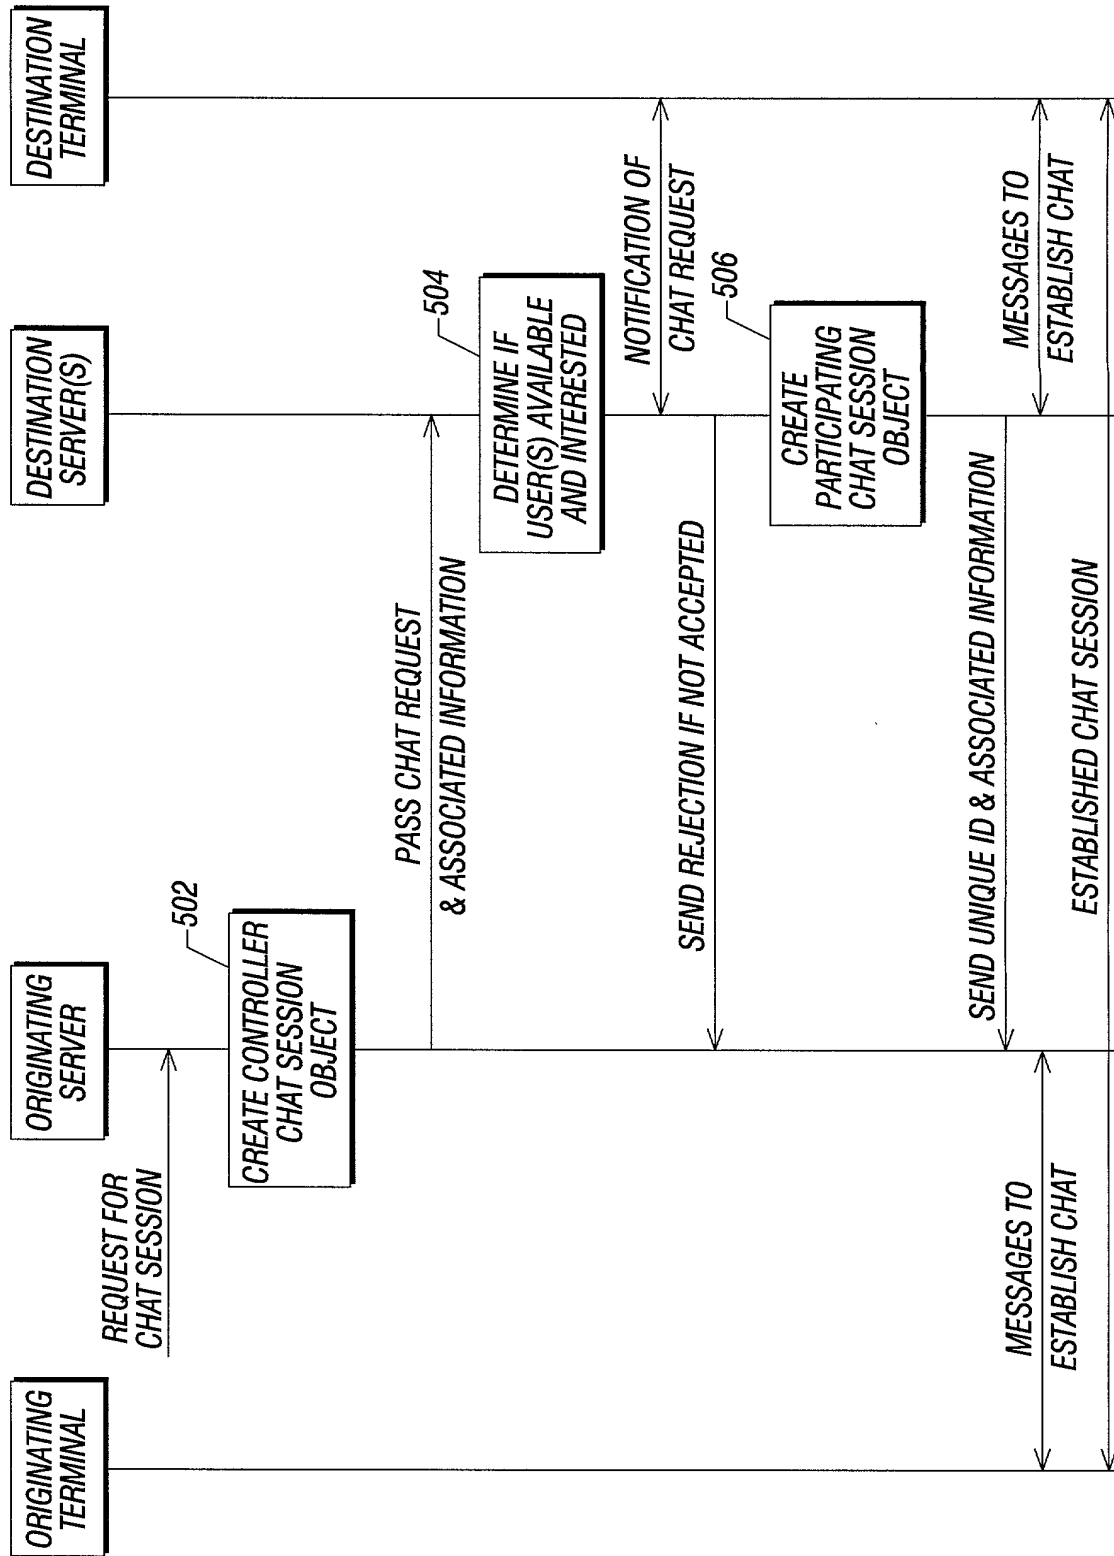


FIG. 6

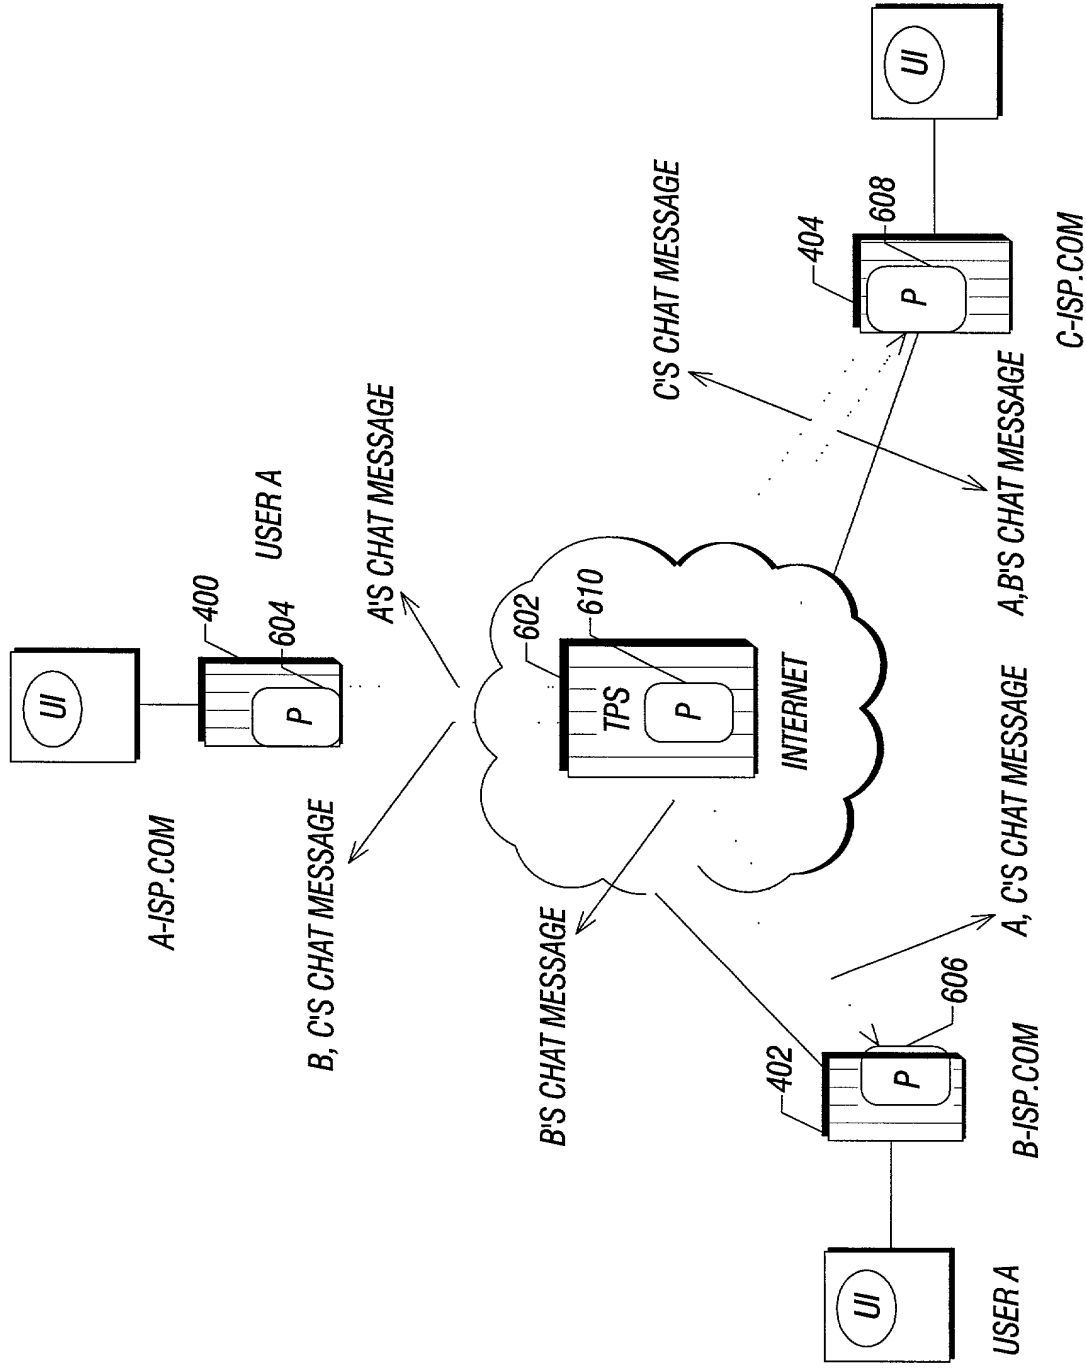


FIG. 7

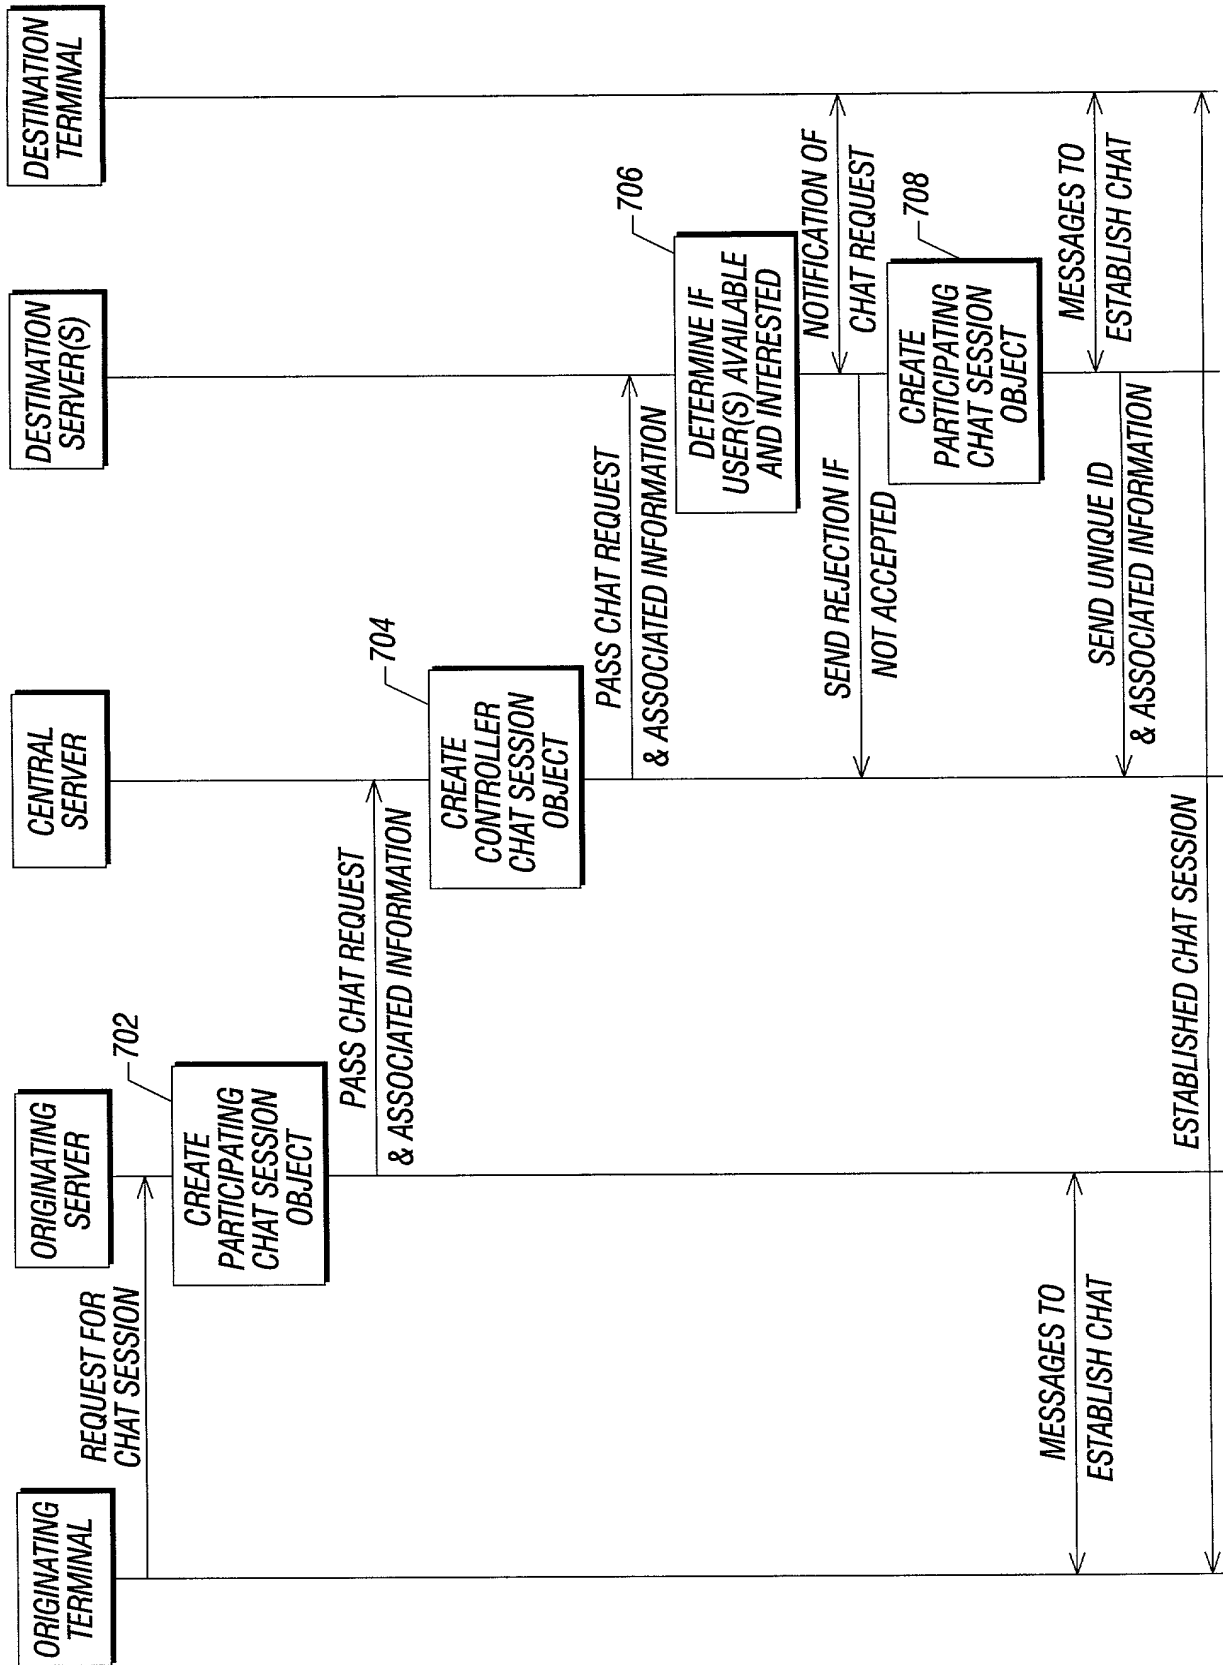


FIG. 8

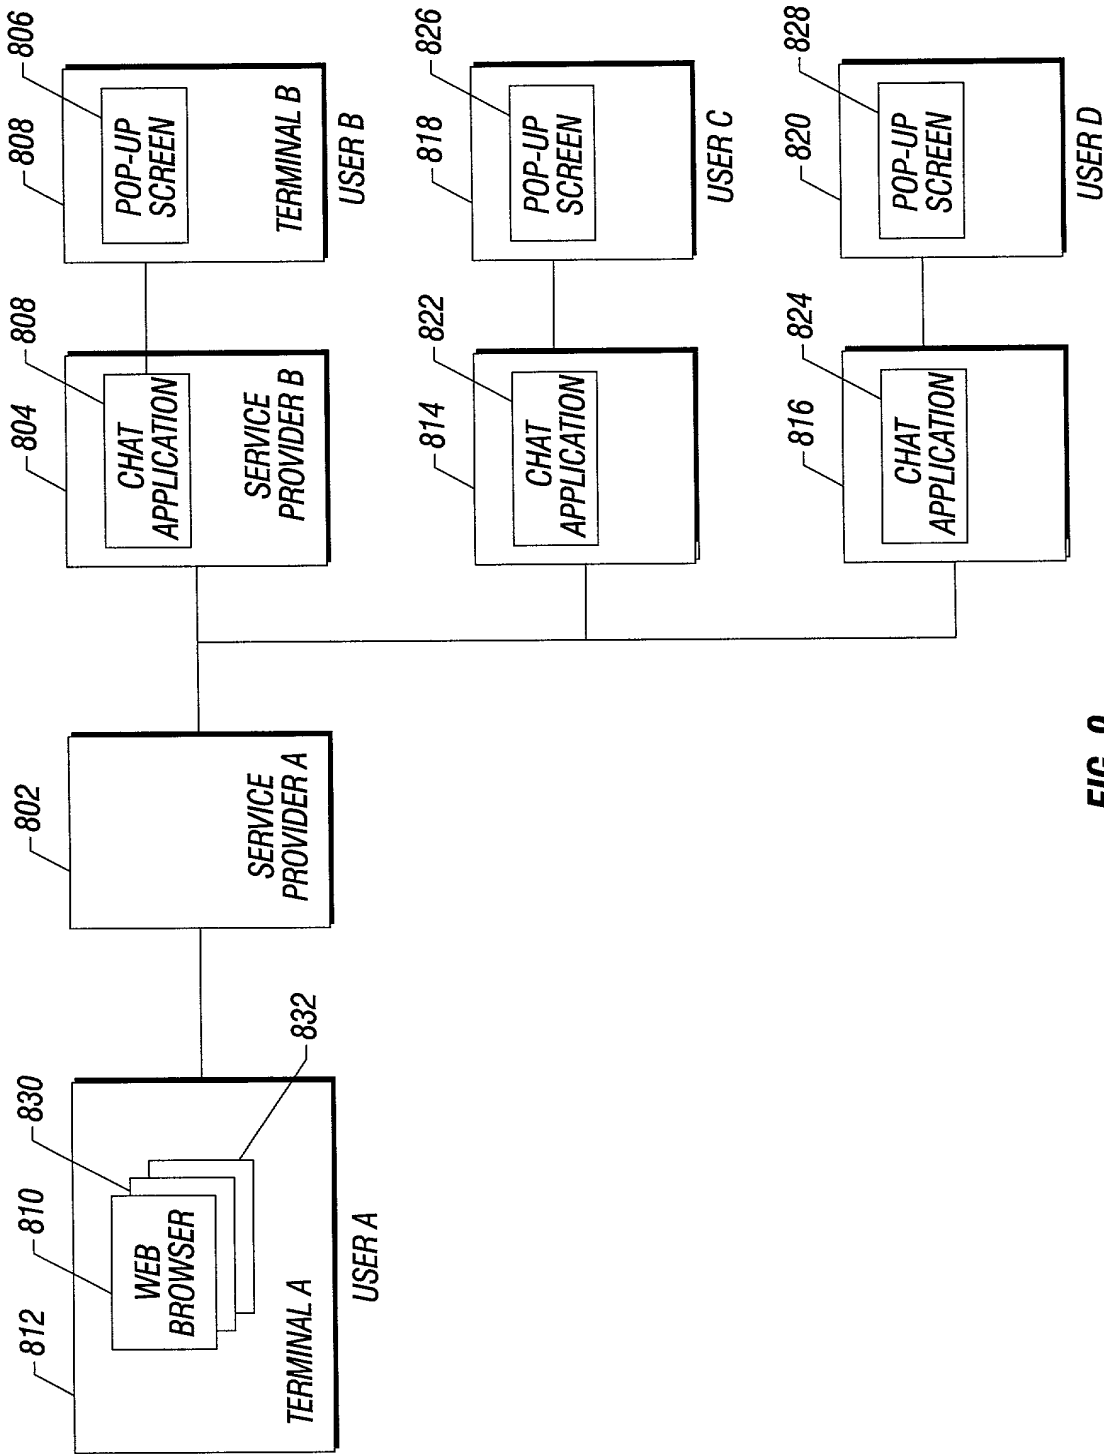


FIG. 9

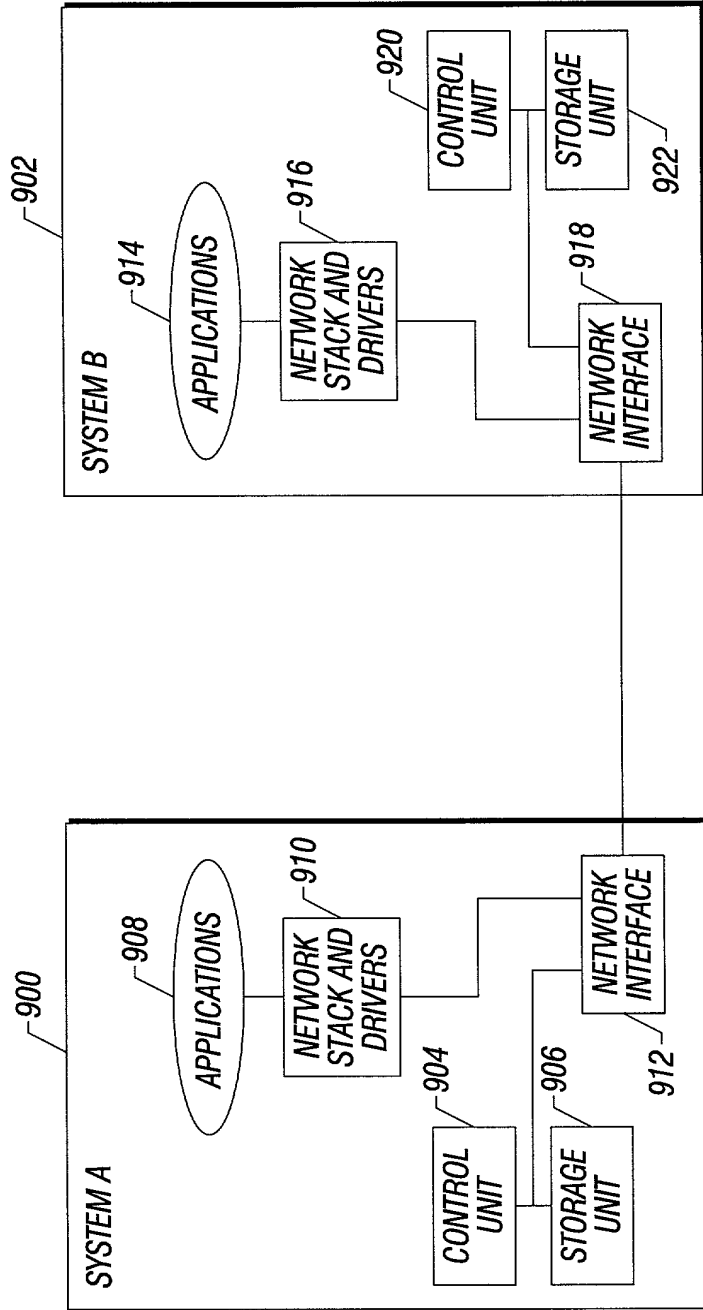


FIG. 10

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am an original, first, and joint inventor (if plural names are listed below), along with Alwarkurichi Nagaraj, of the subject matter which is claimed and for which a patent is sought on the invention entitled

MESSAGING BETWEEN TERMINALS IN DIFFERENT COMMUNITIES

the specification of which

X	is attached hereto.
	was filed on _____ as
	United States Application Number _____
	or PCT International Application Number _____
	and was amended on _____
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate Issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

Priority Claimed

Number	(Country)	(Day/Month/Year Filed)	Yes	No
Number	(Country)	(Day/Month/Year Filed)	Yes	No

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

(Application Number)	(Filing Date)
(Application Number)	(Filing Date)



I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Number)	Filing Date	(Status-patented, pending, abandoned)
----------------------	-------------	---------------------------------------

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, Reg. No. 40,025; Coe F. Miles, Reg. No. 38,559, and John R. Merkling, Reg. No. 31,716 my patent attorneys, of TROP, PRUNER, HU & MILES, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and John D. Crane, Reg. No. 25,231; W. Glen Johnson, Reg. No. 39,525; Paul W. Fulbright, Reg. No. 38,145; Richard A. Weiss, Reg. No. 35,734; Vernon E. Williams, Reg. No. 38,713; my patent attorneys, of Nortel Networks Corporation; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Dan C. Hu, TROP, PRUNER, HU & MILES, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

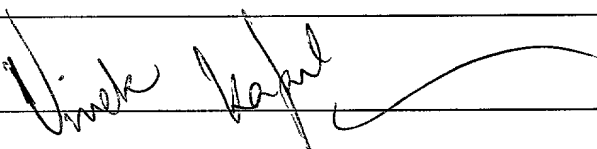Full Name of Sole/First Inventor: Vivek Kapil	
Inventor's Signature: 	Date: Nov 10 '99
Residence: 2612 Merlin Drive, Lewisville, TX 75056	Citizenship: Canada
Post Office Address: 2612 Merlin Drive, Lewisville, TX 75056	
Full Name of Third/Joint Inventor: John R. Stevens	
Inventor's Signature: 	Date: 10/10/99
Residence: 4312 Fairfax Hill Dr., Plano, TX 75024	Citizenship: U.S.A.
Post Office Address: 4312 Fairfax Hill Dr., Plano, TX 75024	

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Applicant:	§	
Vivek Kapil, Alwarkurichi Nagaraj,	§	
and John R. Stevens	§	Group Art Unit: N/A
	§	
Serial No.: N/A	§	Examiner: N/A
	§	
Filed: N/A	§	
	§	
Title: MESSAGING BETWEEN	§	Docket No: NORT-0010-US
TERMINALS IN DIFFERENT	§	(10410RRUS01U)
COMMUNITIES	§	

Assistant Commissioner of Patents and Trademarks
Washington, DC 20231

**ADDED PAGE TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR
SIGNATURE BY JOINT INVENTOR(S) ON BEHALF OF NONSIGNING INVENTOR(S)
WHO REFUSE(S) TO SIGN OR CANNOT BE REACHED (37 CFR 1.47(a))**

I am an above named joint inventor and have signed this declaration on my own behalf and
also sign this declaration under 37 CFR 1.47(a) on behalf of the nonsigning joint inventor,
particulars for whom are:

Full name of non-signing inventor, Alwarkurichi Nagaraj, who

- ☐ refuses to sign
☒ cannot be found or reached

India
Country of Citizenship of nonsigning inventor

3026 Beltline Rd., Apt. 1914, Garland, TX 75044
Last known address of nonsigning inventor

Accompanying this declaration is:

- (1) A Statement of Facts in Support of Filing on Behalf of Nonsigning Inventor
- (2) The Petition Fee of \$130 (37 CFR 1.47(i))

Vivek Kapil


Signature

John R. Stevens


Signature